




USK BEARING COMPANY

NTN RNA69/22R Needle roller bearing- without inner ring

Bearing No. RNA69/22R

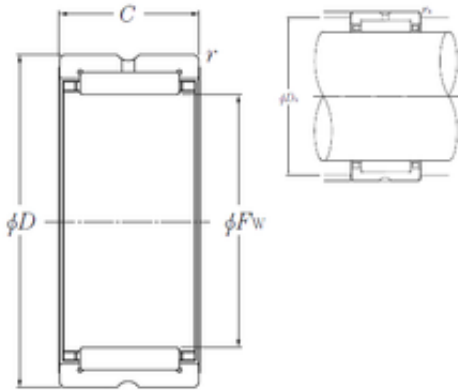

RNA69/22R Bearing 2D drawings and 3D CAD models

Size	28x39x30 mm
Bore Diameter	28 mm
Outer Diameter	39 mm
Width	30 mm
Fw	28 mm
D	39 mm
C	30 mm
r min.	0,3 mm
Da max.	37 mm
ra max.	0,3 mm
Weight	0,1 Kg
Basic dynamic load rating (C)	40 kN
Basic static load rating (C0)	58,5 kN
(Grease) Lubrication Speed	9500 r/min
rs min	0.3 mm
Dw	4 mm
Lw	25.4 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.1 kg
Cr	40 kN
C0r	58.5 kN



USK BEARING COMPANY

Nlim (grease)	9,500 rpm
Nlim (oil)	14,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.88 Hz
Characteristic outer ring frequency, BPF0	7 Hz
Characteristic inner ring frequency, BRFI	9 Hz
Da max	37 mm
ras max	0.3 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.098
Product Group	B04144